




F40JMHD

The Africa 4-stroke range, born from monitoring and Yamaha's long experience, has been specially developed to meet the extreme conditions of use. Power and reliability are the hallmarks of this range of engines in a field where Yamaha is the reference brand.

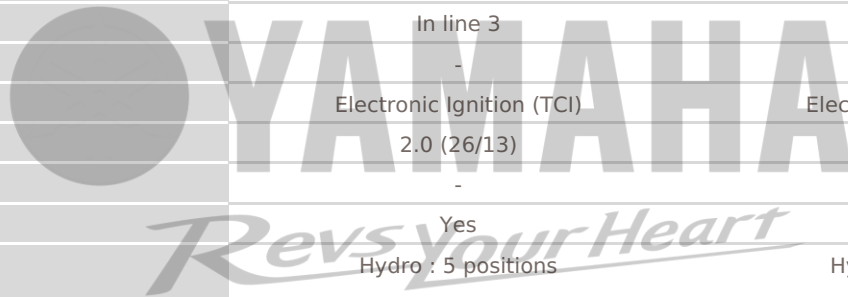

TECHNICAL CHARACTERISTICS	F40JMHD	F40JMHD
MOTOR		
Displacement (cc)	747	747
Architecture	L3	L3
Bore x Stroke (mm)	65.0 X 75.0	65.0 X 75.0
Full throttle operating range (tr/min)	5000-6000	5000-6000
Fuel	Wet Sump	Wet Sump
Fuel consumption (L/h-tr/min)	15.2 L/h @5500 r/min	15.2 L/h @5500 r/min
Lubrication system	Unleaded	Unleaded
Power system	3 carburetors	3 carburetors
Reduction ratio	9.4 :1	9.4 :1
Number of Displacement	In line 3	In line 3
Maximum Power (Kw)	-	-
Ignition System	Electronic Ignition (TCI)	Electronic Ignition (TCI)
Gear Ratio	2.0 (26/13)	2.0 (26/13)
Steering Control	-	-
Reverse direction	Yes	Yes
Trim method (positions)	Hydro : 5 positions	Hydro : 5 positions
Engine Type	4 stroke	4 stroke
Start-up	Manual Start	Manual Start
Max.Prop Shaft Horsepower (Kw)	29.4 (40 hp)	29.4 (40 hp)
MORE		
Control	Remote Control	Remote Control
Alternator	14 A	14 A
Propeller Rotation	Clockwise	Clockwise
DIMENSIONS		
Engine Oil Capacity (L)	-	-
Oil capacity (L)	1.7 L / 1.5 L	1.7 L / 1.5 L
Engine transom height (mm)	L: 536 (21.1 inch)	L: 536 (21.1 inch)
Dry weight with propeller (kg)	95	95

Always wear a helmet, eye protection and protective proper clothing.
YAMAHANIGERIA encourages you to ride safely with responsible manners that comply with all laws while respecting the environment.

